

# CLEAResult<sup>®</sup> Canada

We change the way people use energy.<sup>™</sup>

---

## Product Catalogue

---



# Contents

<b>BUILD AN ENERGY SAVINGS KIT CAMPAIGN .....</b>	<b>7</b>
<b>LIGHTING .....</b>	<b>8</b>
EA19O9D27 LED A19 Bulb 2700K, 3000K.....	8
EA2117D2700 LED A21 Bulb 2700K.....	8
A17 3000 LED A17 Bulb 2700K, 3000K.....	9
A21 3000 LED A21 Bulb 3000K.....	9
A19 5000 LED A19 Bulb 5000K.....	10
EA19O9D27R LED A19 Bulb 2700K.....	10
L9A19D2530K LED A19 Bulb 3000K.....	11
L9A19D2541K LED A19 Bulb 4100K.....	11
L9A19D2550K LED A19 Bulb 5000K.....	12
EG2545D27 LED G25 Globe Bulb 2700K .....	12
N9277 LED Nightlight .....	13
EB1365D27E12 LED B13 Chandelier Bulb 2700K .....	13
EPAR3010D3040 LED PAR30 Bulb 10W 3000K.....	14
EPAR38D17-30K40 LED PAR38 Bulb, 17W, 3000K .....	14
EGU1065D2738 LED GU10 6.5W Bulb, 3000K.....	15
MR16-MR16 LED MR16 7W Bulb, 2700K .....	16
EPAR207D3040 LED PAR20 7W Bulb, 3000K.....	16
LED12BR30D41KFL LED BR40, 12W Bulb, 3000K.....	17
LED12BR30D30K LED BR30 Reflector Bulb, 3000K.....	17
LED12BR40D27K LED BR40 12W Bulb, 2700K.....	18
LED14P38D30KFL LED COB PAR Lamp P38 FL.....	18
LED12BR30D27K LED BR30 12W Bulb 2700K.....	19



L65BR30N25UNV27K LED BR30 8W Bulb 2700K.....	19
L120P38D2527KFL Dimmable 13W 2700K PAR38 LED Bulb .....	20
L65BR30D2541KCQ LED BR30 Lamp 3.8", 8W, 4100K.....	20
L85BR40D2541K 14W Elite LED BR40 Lamp 4100K.....	21
LED712VMR16V41KFL LED MR16 Lamp GU5.3 FL 1.8", 6.5W, 4100K.....	21
L75P30D2540KFL LED PAR30 Lamp 3.8", 9W, 4100K .....	22
L90P38D2540KFL LED SMD Par Lamp P38 FL 4.8", 10W, 4000K .....	22
LED7MR16GU1041KFL LED MR16 Lamp GU10 FL 2.3", 6W, 4100K.....	23
L50P20D5041KFL LED PAR20 Lamp 7W 4000K.....	23
LPT815B241K Double Ended Bypass Tube PET Coated 4', 15W, 4100K.....	24
LPT815B250K Double Ended Bypass Tube PET Coated 4', 15W, 5000K.....	24
LT8F34B250K Ballast Bypass T8 LED Type B Tube 8', 34W, 5000k.....	25
L9T8BY5041K 9w 2' LED T8 Tube Ballast Bypass 4100K.....	25
L12T8BY5041K 12w 3' LED T8 Tube Ballast Bypass 4100K.....	26
LED14P38D27KLF 14W Elite PAR38 Flood LED bulb 2700K .....	26
<b>WATER MEASURES.....</b>	<b>27</b>
EA10BPCA Ecofitt Basin Aerator, Chrome, dual thread, 1.0GP .....	27
EA15BPCA.....	27
EA15BPCATP .....	28
EK15SW .....	28
ESH12CH.....	29
ES3FH15CH.....	29
N2945CH.....	30
ESH15CH.....	30
N2935CH 2.0 GPM High Efficiency Handheld Showerhead .....	31



ES3FF15CH .....	31
ES3FF15CHTP .....	32
ES3FF15WH .....	32
N2920CH.....	33
N2912CH.....	33
N2912 .....	34
N2915CH.....	34
N2915N .....	35
ESF15W .....	35
ESF20WH.....	36
ESF15CH .....	36
N2920 2.0 GPM Low Flow Showerhead Earth White .....	37
N2912 1.25 GPM Earth Showerhead White .....	37
N2915V 1.5 GPM Earth 9 Jet White Shower Head W/ Built In Volume Control .....	38
N2915CH 1.5 GPM Earth Showerhead Chrome .....	38
N3126VP-C 1.5 GPM Dual Function Aerator - All Chrome - Pom Ball .....	39
N2610CH 1-Spray With 1.0-1.5 GPM Wall Mount Adjustable Fixed Shower Head .....	39
N3137 .....	40
N3145 Adjustable Toilet Flapper.....	40
N2146 .....	41
N3140 .....	41
<b>MORE ENERGY SAVINGS .....</b>	<b>42</b>
50016WD .....	42
N9173G .....	42
TS1810.....	43



N4101 .....	43
N9010 .....	44
EN9011 .....	44
S2065-B .....	45
N9150K.....	45
N181C .....	45
N9189 .....	46
8074S PB .....	46
4020S PB .....	47
N4000-P12 .....	47
1004SPB .....	48
8006S PB <i>Foam Backer Rod 3/4" X 15'</i> .....	49
8001S PB <i>Insulating Foam Backer Rod 3/8 In. X 30 Ft.</i> .....	49
1003S PB <i>Interior Patio Door Insulation Kit 84 X 86"</i> .....	50
1004S PB <i>Window Shrink Kit 42" x 64"</i> .....	50
N4014V.....	51
N1001 <i>Deluxe Caulking Gun</i> .....	51
1652SPB <i>Soft Rubber Door and Window Seal 16'</i> .....	52
TS2003 <i>Plug-in Energy Monitor - Watt Meter, Power Meter, Electric Meter, Outlet Tester</i> .....	52
74852 <i>162-Ml White Acrylic Latex Plus Silicone Caulking</i> .....	53
Foil Tape (46M) .....	53
C3010D-CA <i>Kidde Nighthawk Carbon Monoxide Alarm</i> .....	54
C3010-CA <i>Kidde Carbon Monoxide Alarm</i> .....	54
DS128W36 <i>PVC Door Shoes and Door Sweep</i> .....	55
DS121AV36 <i>Aluminum Threshold Outswing Door</i> .....	55



DS156A36 CRL Aluminum Door Sweep .....	56
FWM-01-10001 Titebond Heavy Duty Construction Adhesive .....	56
NUC-01-10065 PF-50 Straw Foam with Straw .....	57
MIS-01-10784 Durofoam EPS Rigid Insulation .....	57
DS422W16.5 Door Weatherstrip, 81 In L, Climaloc Foam .....	58
1007S PB Window Insulating Film Kit (62 X 84 inch).....	58
Refrigerator/Freezer Temperature Card .....	59
900-0263CO-CA AC Plug-In Carbon Monoxide Alarm .....	59
MS-OPS5M-WH Maestro Sensor Switch, 5A .....	60
DRY-01227 Foldable Clothes Drying Rack .....	60
DRY-01113 Retractable Clothesline .....	61



## Build An Energy Savings Kit Campaign

Equip your clients, partners, and employees with our Build Your Own Energy Savings Kit. Perfect for events, corporate gifts, promotional giveaways, and more. Showcase your company's dedication to reducing energy consumption and minimizing our environmental impact.

### Step 1) Choose the products to be included in your kit.

Select a variety of products listed in the catalogue (some products not available due to size). Some examples of our most popular products for energy savings kits are:

- LED light bulbs & Nightlights
- Weatherization materials (i.e. Window film, foam tape, caulking)
- Water measures (i.e. Low-flow showerheads & aerators)
- Clotheslines
- & more!



### Step 2) Choose your packaging.

Kits can be packaged in boxes, bubble mailers, or tote bags depending on your mode of delivery. Tote bags are great for corporate events or gifts. Boxes and bubble mailers provide protection for materials during individual shipping of kits. All options can be fitted with your company's logo and branding.



### Step 3) Choose a delivery method.

Kits can be delivered in a bulk order to your office or warehouse to be distributed by your organization at an event or directly to the recipient. Alternatively, kits can be shipped directly to homeowners or recipients from our warehouses. Please reach out to our sales team at [canada.wholesale@clearesult.com](mailto:canada.wholesale@clearesult.com) to discuss shipping methods and pricing.



COLOUR OPTIONS MIGHT VARY ● ● ● ● ● ● ● ●

All product availability, costs, and shipping are subject to change and variable pricing. Please reach out to our sales team via the website contact information where you will be directed to your local sales team who will be able to help you customize and create your ideal kit.



## Lighting

### EA19O9D27 LED A19 Bulb 2700K, 3000K



Ecofitt's *Eco brilliant* LED bulb has an estimated energy cost of \$0.90 per year. This 40W replacement bulb uses only 7.5W/120V of energy.

- Base Type: E26
- Bulb Shape: A19
- Lifespan (hours): 25,000
- Dimmable: Yes
- Voltage: 120V
- Colour Designation: 2700K, 3000K (Warm White)

### EA2117D2700 LED A21 Bulb 2700K




Ecofitt's *Eco brilliant* dimmable LED bulb is ENERGY STAR® certified and has an estimated energy cost of \$0.90 per year. This 100W replacement bulb uses only 17W/120V of energy.


- Base Type: E26
- Bulb Shape: A21
- Lifespan (hours): 25,000
- Dimmable: Yes
- Voltage: 120V
- Colour Designation: 2700K (Warm White)




### A17 3000 LED A17 Bulb 2700K, 3000K

	<p>This LED bulb is ENERGY STAR® certified, ensuring high energy efficiency and performance, with a minimal energy consumption of only 9.5 W/120V of energy.</p> <ul style="list-style-type: none"> <li>• Base Type: E26 (Standard Medium Base)</li> <li>• Lifespan (hours): 25,000, minimizing the need for frequent replacements.</li> <li>• Brightness: 800 Lumens</li> <li>• Beam Angle: 220 degrees</li> <li>• Allows for adjustable brightness to suit different settings and moods</li> <li>• Colour Temperature: 2700K, 3000K (Warm White)</li> </ul>
---	---


### A21 3000 LED A21 Bulb 3000K

	<p>This LED bulb offers long-lasting performance, reducing the need for frequent replacements. Its classic A19 bulb shape design and standard E26 screw-in base fits well in a variety of fixtures and lamps, while also using only 15W/120V of energy.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: A19</li> <li>• Lifespan (hours): 25,000</li> <li>• Colour Temperature: 3000K (Warm White)</li> <li>• Beam Angel: 220 degrees: provides extensive light coverage, ideal for general lighting purposes.</li> </ul>
---	---

### A19 5000 LED A19 Bulb 5000K

	<p>This LED bulb comes in the classic A19 bulb shape, fitting well in a variety of fixtures and lamps, while also using only 9W of power, saving up to 78% on energy costs.</p> <ul style="list-style-type: none"> <li>• Bulb Shape: A19</li> <li>• Lifespan (hours): 15,000, reducing the need for frequent replacements.</li> <li>• Wide 300° beam angle, perfect for both upward and downward lighting in various fixtures.</li> <li>• Compatible with most dimmers</li> <li>• Colour Designation: 5000K (Daylight), ideal for areas where bright, clear light is needed.</li> </ul>
---	---

### EA19O9D27R LED A19 Bulb 2700K

	<p>Ecofitt's <i>Eco brilliant</i> LED bulb is ENERGY STAR® certified and has an estimated energy cost of \$0.90 per year. This 60W replacement bulb uses only 9W/120V of energy.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: A19</li> <li>• Lifespan (hours): 25,000, minimizing the need for frequent replacements.</li> <li>• Dimmable: Yes</li> <li>• Colour Designation: 2700K (Warm White)</li> </ul>
---	---

**L9A19D2530K LED A19 Bulb 3000K**

	<p>This LED bulb comes in the classic A19 bulb shape design and standard E26 screw-in base, fitting well in a variety of fixtures and lamps, while also using only 9W/120V of energy. Its OMNI-directional beam angle is ideal for broad light distribution.</p> <ul style="list-style-type: none"><li>• Base Type: E26</li><li>• Bulb Shape: A19</li><li>• Lifespan (hours): 25,000</li><li>• Dimmable: Yes</li><li>• Delivers 800 lumens for bright and clear illumination</li><li>• Provides significant energy savings compared to traditional incandescent bulbs</li><li>• Colour Temperature: 3000K (Warm White)</li><li>• Exceptional colour consistency and rendering</li></ul>
---	---

**L9A19D2541K LED A19 Bulb 4100K**

	<p>This LED bulb comes in the classic A19 bulb shape design and standard E26 screw-in base, fitting well in a variety of fixtures and lamps, while also using only 9W/120V of energy. Its OMNI-directional beam angle is ideal for broad light distribution.</p> <ul style="list-style-type: none"><li>• Base Type: E26</li><li>• Bulb Shape: A19</li><li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li><li>• Delivers 825 lumens for bright and clear illumination</li><li>• Provides significant energy savings compared to traditional incandescent bulbs</li><li>• Colour Temperature: 4100K (Natural White)</li><li>• Exceptional colour consistency and rendering</li></ul>
---	--


### L9A19D2550K LED A19 Bulb 5000K

	<p>This LED bulb comes in the classic A19 bulb shape design and standard E26 screw-in base, fitting well in a variety of fixtures and lamps, while also using only 9W of energy. Its OMNI-directional beam angle is ideal for broad light distribution.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: A19</li> <li>• Lifespan (hours): 25,000</li> <li>• Delivers 825 lumens for bright and clear illumination</li> <li>• Dimmable: Yes</li> <li>• Provides significant energy savings compared to traditional incandescent bulbs</li> <li>• Colour Temperature: 5000K (Daylight)</li> <li>• Exceptional colour consistency and rendering</li> </ul>
---	---


### EG2545D27 LED G25 Globe Bulb 2700K

	<p>This LED G25 Globe bulb only uses 4.5W/120V of energy, promoting minimal energy consumption and helps lower your electricity bills.</p> <ul style="list-style-type: none"> <li>• Lifespan (hours): 15,000</li> <li>• Dimmable: Yes</li> <li>• 40W replacement</li> <li>• Rated Luminous Flux (lm): 450</li> <li>• Luminous Efficiency: 75 Lm/W</li> <li>• Beam Angle: 220°</li> <li>• Line Frequency: 5-60Hz</li> <li>• Colour Designation: 2700K (Warm White)</li> </ul>
---	--


## N9277 LED Nightlight

	<p>Niagara's LED Night-Light with Photocell provides energy-efficient light in an attractive case in a neutral colour that complements any decor. The integrated photocell will automatically turn the light on at dusk, and off at dawn.</p> <ul style="list-style-type: none"> <li>• Light-Emitting Diode (LED) technology provides sufficient and energy-efficient light.</li> <li>• 0.3-Watt photocells add to the efficiency of the nightlight</li> <li>• Plastic case features a neutral appearance</li> </ul>
---	--


## EB1365D27E12 LED B13 Chandelier Bulb 2700K

	<p>Ecofitt's <i>Eco brilliant</i> dimmable LED bulb is ENERGY STAR® certified and has an estimated energy cost of \$0.78 per year. This 75W replacement bulb uses only 6.5W/120V of energy.</p> <ul style="list-style-type: none"> <li>• Base Type: B13</li> <li>• Bulb Shape: GU10</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Dimmable: Yes</li> <li>• Weight: 86 grams</li> <li>• Colour Designation: 2700K (Warm White)</li> </ul>
---	---


### EPAR3010D3040 LED PAR30 Bulb 10W 3000K

	<p>Ecofitt's <i>Eco brilliant</i> LED dimmable 75W replacement bulb is ENERGY STAR® certified and has an estimated energy cost of \$1.20 per year.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: Par30</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Dimmable: Yes</li> <li>• Voltage: 120V</li> <li>• Colour Designation: 3000K (Warm White)</li> </ul>
---	--


### EPAR38D17-30K40 LED PAR38 Bulb, 17W, 3000K

	<p>Ecofitt's <i>Eco brilliant</i> dimmable LED 100W replacement bulb has an estimated energy cost of \$1.81 per year.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: Par38</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Dimmable: Yes</li> <li>• Voltage: 120V</li> <li>• Colour Designation: 3000K (Warm White)</li> </ul>
---	---


### EPAR207D2740 LED PAR20 7W Bulb, 2700K

	<p>Ecofitt's <i>Eco brilliant</i> dimmable LED 50W replacement bulb is ENERGY STAR® certified, with an estimated energy cost of \$0.84 per year.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: Par20</li> <li>• Lifespan (hours): 25,000, offering long-lasting performance, reducing the need for frequent replacements.</li> <li>• Dimmable: Yes</li> <li>• Voltage: 120V</li> <li>• Colour Designation: 2700K (Warm White)</li> </ul>
---	---


### EGU1065D2738 LED GU10 6.5W Bulb, 3000K

	<p>Ecofitt's <i>Eco brilliant</i> dimmable LED bulb is ENERGY STAR® certified and has an estimated energy cost of \$0.78 per year. This 75W replacement bulb uses only 6.5W/120V.</p> <ul style="list-style-type: none"> <li>• Base Type: GU10</li> <li>• Bulb Shape: GU10</li> <li>• Lifespan (hours): 25,000</li> <li>• Dimmable: Yes</li> <li>• Weight: 86 grams</li> <li>• Colour Designation: 3000K (Warm White)</li> </ul>
---	--

### MR16-MR16 LED MR16 7W Bulb, 2700K


	<p>This 60W replacement bulb, uses up to 85% less energy compared to halogen replacements while also providing smooth, uniform dimming for the perfect mood and atmosphere.</p> <ul style="list-style-type: none"> <li>• Brightness: 500 Lumens</li> <li>• Weight: 8.49 grams</li> <li>• Lifespan (hours): 25,00</li> <li>• Ideal for sensitive display lighting due to very low heat output.</li> <li>• Beam Angle: 40 degrees</li> <li>• Colour Temperature: 2700K (Warm White)</li> </ul>
---	--

### EPAR207D3040 LED PAR20 7W Bulb, 3000K

	<p>This LED bulb is designed to consume less power while emitting bright light, perfect for extended use while reducing the need for frequent replacements.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• 7 Watts (equivalent to 50 Watts incandescent)</li> <li>• 625 lumens</li> <li>• Beam Angle: 40 degrees</li> <li>• Colour Temperature: 3000K (Warm White)</li> </ul>
---	---




### LED12BR30D41KFL LED BR40, 12W Bulb, 3000K

	<p>This LED bulb is a long-lasting bulb that can operate in temperatures ranging from -30°C to 40°C, while maintaining a minimal energy consumption of 12W (equivalent to 65 Watts incandescent).</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000</li> <li>• Voltage: 120VAC, 50/60Hz</li> <li>• Luminous Flux: 850 lumens</li> <li>• Beam Angle: 110 degrees</li> <li>• Dimensions: Length - 6.0 inches, Diameter - 5.0 inches</li> <li>• Colour Rendering Index (CRI): 80</li> <li>• Colour Temperature: 3000K (Warm White)</li> </ul>
---	---


### LED12BR30D30K LED BR30 Reflector Bulb, 3000K

	<p>This LED bulb is ideal for general lighting, recessed lighting, and track lighting. This bulb uses only 12.5W/120V of energy.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Beam Angle: 110 degrees</li> <li>• Dimmable: Yes</li> <li>• Luminous Flux: 800 lumens</li> <li>• Amperage Rating: 120 mA</li> <li>• Dimensions: Diameter - 94.996 mm, Length - 134.874 mm</li> <li>• Finish: Opal</li> <li>• Colour Temperature: 3000K (Warm White)</li> </ul>
---	--

### LED12BR40D27K LED BR40 12W Bulb, 2700K

	<p>This LED bulb is a long-lasting UL Listed certified bulb for damp locations. This bulb also maintains a minimal energy consumption of 12W/120V (equivalent to 85 Watts incandescent).</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Beam Angle: 110 degrees</li> <li>• Luminous Flux: 850 lumens</li> <li>• Colour Rendering Index (CRI): 82</li> <li>• Dimmable: No</li> <li>• Lifespan (hours): 25,000</li> <li>• Dimensions: Width - 5.00 inches, MOL (Maximum Overall Length) - 6.6 inches</li> <li>• Colour Temperature: 2700K (Warm White)</li> </ul>
---	---

### LED14P38D30KFL LED COB PAR Lamp P38 FL

	<p>This LED bulb offers long-lasting performance, reducing the need for frequent replacements. This bulb also maintains a minimal energy consumption of 13.5W/120V (equivalent to 90 Watts incandescent).</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Beam Angle: 40 degrees</li> <li>• Luminous Flux: 1050 lumens</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000</li> <li>• Dimensions: Diameter - 4.8 inches</li> <li>• Weight: 0.7 lbs</li> <li>• Colour Temperature: 3000K (Warm White)</li> </ul>
---	---

**LED12BR30D27K LED BR30 12W Bulb 2700K**

This long-lasting, shatter-resistant LED bulb is ideal for sensitive display lighting such as art galleries. This bulb also contributes to energy saving through its consumption of 85% less energy compared to halogen alternatives.


- Base Type: E26
- Beam Angle: 110 degrees
- Luminous Flux: 850 lumens
- Dimmable: Yes
- Lifespan (hours): 25,000
- 12 Watts (equivalent to 85 Watts incandescent)
- Voltage: 120V
- Certifications: UL Listed (Damp Location)
- Smooth, clean outside housing
- Colour Temperature: 2700K (Warm White)

**L65BR30N25UNV27K LED BR30 8W Bulb 2700K**

This long-lasting LED bulb comes in the standard E26 screw-in base, fitting well in a variety of fixtures and lamps, while also featuring a minimal energy consumption of 8W/120V (equivalent to 65 Watts incandescent).

- Base Type: E26
- Luminous Flux: 650 lumens
- Beam Angle: 110 degrees
- Dimmable: Yes
- Lifespan (hours): 25,000
- Colour Temperature: 2700K (Warm White)


### **L120P38D2527KFL Dimmable 13W 2700K PAR38 LED Bulb**

	<p>This long-lasting LED bulb comes in the standard E26 screw-in base, fitting well in a variety of fixtures and lamps, while also featuring a minimal energy consumption of 13.5W/120V (equivalent to 90 Watts incandescent).</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Beam Angle: 40 degrees</li> <li>• Luminous Flux: 1050 lumens</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000</li> <li>• Dimensions: Diameter - 4.8 inches</li> <li>• Weight: 0.95 lbs</li> <li>• Colour Temperature: 2700K (Warm White)</li> </ul>
---	---

### **L65BR30D2541KCQ LED BR30 Lamp 3.8", 8W, 4100K**

	<p>This long-lasting LED bulb provides significant energy savings compared to traditional incandescent bulbs, with a minimal energy consumption of 8W/120V (equivalent to 65 Watts incandescent).</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: R30</li> <li>• Lumens: 650</li> <li>• Beam Angle: 110°</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Weight: 0.75 lbs</li> <li>• Colour Temperature: 4100K (Natural White)</li> </ul>
---	--

### **L85BR40D2541K 14W Elite LED BR40 Lamp 4100K**


	<p>This long-lasting LED bulb provides significant energy savings compared to traditional incandescent bulbs, with a minimal energy consumption of 14W/120V.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Dimmable: Yes</li> <li>• Luminous flux: Delivers 1200 lumens for bright and clear illumination</li> <li>• Lifespan (hours): 25,000</li> <li>• Wide Beam Angle: 110° beam angle for broad light distribution</li> <li>• High CRI: Exceptional colour consistency and rendering</li> <li>• Colour Temperature: 4100K (Natural White)</li> </ul>
---	---

### **LED712VMR16V41KFL LED MR16 Lamp GU5.3 FL 1.8", 6.5W, 4100K**

	<p>This long-lasting LED bulb is suitable for various applications in commercial, industrial, and residential settings. This bulb also contributes to significant energy savings compared to traditional halogen lamps, with a minimal energy consumption of 6.5W/120V.</p> <ul style="list-style-type: none"> <li>• Base Type: GU5.3</li> <li>• Bulb Shape: MR16</li> <li>• Lumens: 500</li> <li>• Dimmable: Yes</li> <li>• Delivers 500 lumens for bright and clear illumination</li> <li>• Lifespan (hours): 25,000</li> <li>• 40° beam angle for broad light distribution</li> <li>• Colour Temperature: 4100K (Natural White)</li> </ul>
---	---



**L75P30D2540KFL LED PAR30 Lamp 3.8", 9W, 4100K**

	<p>This long-lasting LED bulb contributes to significant energy savings compared to traditional incandescent bulbs, with a minimal energy consumption of 120V.</p> <ul style="list-style-type: none"><li>• Base Type: E26</li><li>• Bulb Shape: PAR30</li><li>• Lumens: 770</li><li>• Beam Angle: 40°</li><li>• Dimmable: Yes</li><li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li><li>• Exceptional colour consistency and rendering</li><li>• Colour Temperature: 4100K (Natural White)</li></ul>
---	---

**L90P38D2540KFL LED SMD Par Lamp P38 FL 4.8", 10W, 4000K**

	<p>This long-lasting LED bulb contributes to significant energy savings compared to traditional incandescent bulbs.</p> <ul style="list-style-type: none"><li>• Base Type: E26</li><li>• Bulb Shape: PAR38</li><li>• Lumens: 950</li><li>• Beam Angle: 40°</li><li>• Dimmable: Yes</li><li>• Weight: 0.35 lbs</li><li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li><li>• Exceptional colour consistency and rendering</li><li>• Colour Temperature: 4000K (Natural White)</li></ul>
---	---

### LED7MR16GU1041KFL LED MR16 Lamp GU10 FL 2.3", 6W, 4100K

	<p>This long-lasting LED bulb is suitable for various applications in commercial, industrial, and residential settings. This bulb also contributes to significant energy savings compared to traditional halogen lamps, with a minimal energy consumption of 6W.</p> <ul style="list-style-type: none"> <li>• Base Type: GU10</li> <li>• Bulb Shape: MR16</li> <li>• Lumens: 500</li> <li>• Beam Angle: 40°</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Colour Temperature: 4100K (Natural White)</li> </ul>
---	--

### L50P20D5041KFL LED PAR20 Lamp 7W 4000K

	<p>This long-lasting LED bulb is suitable for various applications in commercial, industrial, and residential settings. This bulb also contributes to significant energy savings compared to traditional incandescent bulbs, with a minimal energy consumption of 7W.</p> <ul style="list-style-type: none"> <li>• Base Type: E26</li> <li>• Bulb Shape: PAR20</li> <li>• Lumens: 575</li> <li>• Beam Angle: 40°</li> <li>• Dimmable: Yes</li> <li>• Lifespan (hours): 25,000, reducing maintenance and replacement costs</li> <li>• Colour Temperature: 4000K (Natural White)</li> </ul>
---	---



**LPT815B241K Double Ended Bypass Tube PET Coated 4', 15W, 4100K**



This tube bulb is compatible with fixtures that operate independently of ballasts, while providing significant energy savings compared to traditional fluorescent tubes.

- Bulb Shape: T8 Linear
- 15 Watts
- Lumens: 2200
- Lifespan (hours): 50,000
- PET coating for added protection and longevity
- Colour Temperature: 4100K (Natural White)

**LPT815B250K Double Ended Bypass Tube PET Coated 4', 15W, 5000K**




This tube bulb is compatible with fixtures that operate independently of ballasts, while providing significant energy savings compared to traditional fluorescent tubes.

- Bulb Shape: T8 Linear
- 15 Watts
- Lumens: 2200
- Lifespan (hours): 50,000
- PET coating for added protection and longevity
- Colour Temperature: 5000K (Daylight)






### **LT8F34B250K Ballast Bypass T8 LED Type B Tube 8', 34W, 5000k**

	<p>This versatile tube bulb is suitable for various applications in commercial, industrial, and residential settings, while providing significant energy savings compared to traditional fluorescent tubes.</p> <ul style="list-style-type: none"><li>• Bulb Shape: T8 Linear</li><li>• 34 Watts</li><li>• Voltage: 120-277V</li><li>• Lumens: 4400 for bright and clear illumination</li><li>• Lifespan (hours): 50,000</li><li>• Beam Angle: 230° beam angle for broad light distribution</li><li>• Colour Temperature: 5000K (Daylight)</li></ul>
---	--

### **L9T8BY5041K 9w 2' LED T8 Tube Ballast Bypass 4100K**

	<p>This versatile tube bulb is suitable for various applications in commercial, industrial, and residential settings, while providing significant energy savings compared to traditional fluorescent tubes.</p> <ul style="list-style-type: none"><li>• Bulb Shape: T8 Linear</li><li>• 9 Watts</li><li>• Lumens: 1200</li><li>• Lifespan (hours): 50,000</li><li>• Beam Angle: 210° beam angle for broad light distribution</li><li>• Dimmable: Yes</li><li>• Certifications: UL/CSA Listed</li><li>• Length: 2 feet</li><li>• Colour Temperature: 4100K (Natural White)</li></ul>
---	---

### L12T8BY5041K 12w 3' LED T8 Tube Ballast Bypass 4100K



This versatile tube bulb is suitable for various applications in commercial, industrial, and residential settings, while providing significant energy savings compared to traditional fluorescent tubes.

- Base Type: Medium Bi Pin
- Bulb Shape: T8 Linear
- 12 Watts
- Lumens: 1450
- Beam Angle: 210°
- Lifespan (hours): 50,000, reducing maintenance and replacement costs
- Colour Temperature: 4100K (Natural White)

### LED14P38D27KLF 14W Elite PAR38 Flood LED bulb 2700K




- 14 Watts (equivalent to 85 Watts incandescent)
- Luminous Flux: 700 lumens
- Base Type: Medium (E26)
- Colour Rendering Index (CRI): 90
- Colour Temperature: 2700K (Warm White)
- Dimmable: Yes, with smooth and uniform dimming
- Lifespan: 35,000 hours
- Shatter resistant
- Consistent colour within 3 MacAdam ellipse tolerance
- Integrated trim for easy installation




## Water Measures


### **EA10BPCA Ecofitt Basin Aerator, Chrome, dual thread, 1.0GP**

	<p>The flow-compensating technology of this bathroom sink aerator guarantees a pressurized feeling while using less water.</p> <ul style="list-style-type: none"><li>• 1.0 gallon per minute (3.8 liter per minute) flow rate</li><li>• Dual-thread brass connection (Male: 15/16-27 Female: 55/64-27)</li><li>• Housing constructed of solid brass with high-polished chrome finish.</li><li>• The 1.0 Bubble spray model is air inducted providing a full stream of water while using less.</li><li>• WaterSense® Certified</li><li>• Tamperproof</li></ul>
---	---


### **EA15BPCA Basin Aerator, 1 model, Chrome, dual thread, 1.5 GPM**

	<p>The flow-compensating technology of this bathroom sink aerator guarantees a pressurized feeling while using less water.</p> <ul style="list-style-type: none"><li>• 1.5 gallon per minute (5.7 liter per minute) flow rate</li><li>• Dual-thread brass connection (Male: 15/16-27 Female: 55/64-27)</li><li>• Housing constructed of solid brass with high-polished chrome finish.</li><li>• The 1.5 GPM Bubble spray model is air inducted providing a full stream of water while using less.</li><li>• WaterSense® Certified</li><li>• Tamperproof</li></ul>
---	---


### EA15BPCATP Basin Aerator Tamper Proof Chrome, Dural Thread, 1.5 GPM

	<p>The flow-compensating technology of this bathroom sink aerator guarantees a pressurized feeling while using less water.</p> <ul style="list-style-type: none"> <li>• 1.0 or 1.5 gallon per minute (3.8 or 5.7 liter per minute) flow rate, depending on model chosen.</li> <li>• Dual-thread brass connection (Male: 15/16-27 Female: 55/64-27)</li> <li>• Housing constructed of solid brass with high-polished chrome finish.</li> <li>• The 1.0 or 1.5 GPM Bubble spray model is air inducted providing a full stream of water while using less.</li> <li>• WaterSense® Certified</li> <li>• Tamperproof</li> </ul>
---	---

### EK15SW Kitchen Aerator 1.5 GPM

	<p>The pressure compensating technology of this kitchen aerator guarantees a consistent flow rate across a wide range of pressure.</p> <ul style="list-style-type: none"> <li>• Dual threaded</li> <li>• Fits most male and female threaded faucets (Male: 15/16-27, Female: 55/64-27)</li> <li>• Does not contain any un-plated brass parts, a lead-free aerator.</li> <li>• Soft rubber nozzles for easy cleaning and decalcification</li> <li>• 10-year warranty</li> <li>• CSA and WaterSense® Certified</li> </ul>
---	---

### ESH12CH Efficient Showerhead (handheld) < 4.8 Lpm


	<p>This showerhead's non-aerating spray means less temperature loss with 40% more energy savings, conserves water and saving money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"> <li>• 9-jet turbo massage is adjustable: gentle needle spray to forceful jet</li> <li>• Consistent flow rate regardless of water pressure</li> <li>• 72-inch tangle free hose</li> <li>• Non-removable flow compensator</li> <li>• Self-cleaning and maintenance-free</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABC thermoplastic body</li> </ul>
---	--

### ES3FH15CH 3 Function 1.5g GPM ULTRA SH Handheld Chrome


	<p>This showerhead's non-aerating spray means less temperature loss with 40% more energy savings, conserves water and saving money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"> <li>• 3 spray settings with gentle needle spray from narrow to wide</li> <li>• Consistent flow rate regardless of water pressure</li> <li>• Stainless steel 62-inch tangle-free hose</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> <li>• Meets or exceeds ANSI specifications.</li> <li>• WaterSense® Certified</li> <li>• 10-year warranty</li> </ul>
---	---



### **N2945CH 1.5 GPM Earth Massage Handheld Chrome**


	<p>The patented pressure-compensating technology of this handheld showerhead guarantees a pressurized feeling while using less water and consistent flow rate regardless of water pressure.</p> <ul style="list-style-type: none"><li>• Conserves 40% more water than standard 2.5 GPM showerheads</li><li>• Includes 72-inch tangle-free hose and mounting bracket.</li><li>• Corrosion-resistant high-impact AMS thermoplastic body, maintenance-free</li><li>• Stream Type: Spray, Massage, and Combo</li><li>• Adjustable Angle: Yes</li><li>• Mounting Type: Handheld with wall mount bracket</li><li>• 10-year warranty</li></ul>
---	---

### **ESH15CH 1.5 GPM Chrome Handheld Showerhead**

	<p>This showerhead saves 40% more energy and money while enhancing pressure, performance, appearance, and luxury, with a consistent flow rate regardless of water pressure.</p> <ul style="list-style-type: none"><li>• 9-jet turbo massage is adjustable: gentle needle spray to forceful jet</li><li>• 72-inch tangle free hose</li><li>• Non-removable flow compensator</li><li>• Non-aerating spray means less temperature loss with maximum energy savings.</li><li>• Self-cleaning and maintenance-free</li><li>• Installs easily, by hand and without tools.</li><li>• Corrosion resistant high-impact ABC thermoplastic body</li><li>• 10-year warranty</li></ul>
---	---



### **N2935CH 2.0 GPM High Efficiency Handheld Showerhead**

	<p>The pressure compensating technology of this handheld showerhead guarantees a consistent flow rate across a wide range of pressure and provides a large spray diameter in an even, vacillating motion.</p> <ul style="list-style-type: none"><li>• GPM: 2.0</li><li>• Three spray settings: 9-jet spray, shower and combo</li><li>• Corrosion-resistant, high-impact ABS thermoplastic body with metal ball joint</li><li>• Includes 72" stainless steel hose for chrome models and 72" nylon reinforced PVC hose and bracket for white model – hoses include a backflow preventer</li></ul>
---	---

### **ES3FF15CH 3 Function 1.5 GPM Fixed Ultra Showerhead Chrome**

	<p>This showerhead's non-aerating spray means less temperature loss with maximum energy savings, conserves water and saves money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"><li>• Colour availabilities: Chrome and White</li><li>• 3 massage settings with gentle needle spray from narrow to wide</li><li>• Consistent flow rate regardless of water pressure</li><li>• Non-removable flow compensator</li><li>• Self-cleaning and maintenance free</li><li>• Installs easily, by hand</li><li>• Corrosion resistant high-impact ABS thermoplastic body</li><li>• Meets or exceeds ANSI specifications.</li></ul>
---	---

### ES3FF15CHTP 1.5 GPM Ultra Showerhead Ecofitt Fixed Tamperproof

	<p>This showerhead's non-aerating spray means less temperature loss with 40% more energy savings, conserves water and saves money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"> <li>• 3 massage settings with gentle needle spray from narrow to wide</li> <li>• Consistent flow rate regardless of water pressure</li> <li>• Non-removable flow compensator</li> <li>• Self-cleaning and maintenance-free</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> <li>• Tamperproof</li> <li>• 10-year warranty</li> </ul>
---	---

### ES3FF15WH Fixed Showerhead White, 1.5 GPM

	<p>This showerhead's non-aerating spray means less temperature loss with 40% more energy savings, conserves water and saves money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"> <li>• 3 massage settings with gentle needle spray from narrow to wide</li> <li>• Consistent flow rate regardless of water pressure</li> <li>• Non-removable flow compensator</li> <li>• Maintenance-free</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> <li>• 10-year warranty</li> </ul>
---	--



**N2920CH 2.0 GPM Earth Massage Chrome Showerhead**

The patented pressure-compensating technology of this showerhead guarantees a pressurized feeling while using less water and reduced water usage also reduces the cost of heating water, earning you more energy savings.


- Flow Rate: 5.7 LPM (1.5 GPM), 7.5 LPM (2.0 GPM)
- Corrosion-resistant high-impact ABS thermoplastic body, maintenance-free, 10-year warranty
- Stream Type: Spray, Massage, and Combo
- Pressure Compensator
- Mounting Type: Fixed
- Nozzle Quantity: 9-45 (Spray Dependent)
- Finish: Chrome

**N2912CH 1.25 GPM Earth Massage Chrome Showerhead**


The patented pressure-compensating technology of this showerhead guarantees a pressurized feeling while using less water and reduced water usage also reduces the cost of heating water, earning you more energy savings.

- Flow Rate: 4.7 LPM (1.25 GPM)
- Corrosion-resistant high-impact ABS thermoplastic body, maintenance-free, 10-year warranty
- Stream Type: Spray, Massage, and Combo
- Adjustable Angle: Yes
- Pressure Compensator
- Mounting Type: Fixed
- Nozzle Quantity: 9-45 (Spray Dependent)
- Finish: Chrome


### N2912 1.25 GPM Earth Massage White Showerhead

	<p>The patented pressure-compensating technology of this showerhead guarantees a pressurized feeling while using less water and reduced water usage also reduces the cost of heating water, earning you more energy savings.</p> <ul style="list-style-type: none"> <li>• Flow Rate: 4.7 LPM (1.25 GPM)</li> <li>• Corrosion-resistant high-impact ABS thermoplastic body</li> <li>• Stream Type: Spray, Massage, and Combo</li> <li>• Adjustable Angle: Yes</li> <li>• Type of Control: Pressure Compensator</li> <li>• Mounting Type: Fixed</li> <li>• Nozzle Quantity: 9-45 (Spray Dependent)</li> <li>• Finish: White</li> </ul>
---	--


### N2915CH 1.5 GPM Earth Massage Chrome Showerhead

	<p>The patented pressure-compensating technology of this showerhead guarantees a pressurized feeling while using less water and reduced water usage also reduces the cost of heating water, earning you more energy savings.</p> <ul style="list-style-type: none"> <li>• Flow Rate: 5.7 LPM (1.5 GPM), 7.5 LPM (2.0 GPM)</li> <li>• Corrosion-resistant high-impact ABS thermoplastic body,</li> <li>• Stream Type: Spray, Massage, Combo</li> <li>• Adjustable Angle: Yes</li> <li>• Type of Control: Pressure Compensator</li> <li>• Mounting Type: Fixed</li> <li>• Nozzle Quantity: 9-45 (Spray Dependent)</li> <li>• Finish: Chrome</li> </ul>
---	--


### N2915N 1.5 GPM Earth Massage White Showerhead

	<p>The patented pressure-compensating technology of this showerhead guarantees a pressurized feeling while using less water, which also reduces the cost of heating water, earning you more energy savings.</p> <ul style="list-style-type: none"> <li>• Flow Rate: 5.7 LPM (1.5 GPM), 7.5 LPM (2.0 GPM)</li> <li>• Corrosion-resistant high-impact ABS thermoplastic body,</li> <li>• Stream Type: Spray, Massage, Combo</li> <li>• Adjustable Angle: Yes</li> <li>• Type of Control: Pressure Compensator</li> <li>• Head Length: 4-1/8" (105mm)</li> <li>• Mounting Type: Fixed</li> <li>• Nozzle Quantity: 9-45 (Spray Dependent)</li> <li>• Finish: White</li> </ul>
---	---


### ESF15W Earth Massage White Showerhead (1.5 GPM)

	<p>The Ecofitt White Fixed Showerhead is a step beyond "low-flow," ensuring 40% less water use than traditional low-flow showerheads currently on the market along with a consistent flow rate regardless of water pressure.</p> <ul style="list-style-type: none"> <li>• Non-removable flow-compensating technology guarantees a feeling of great force while using less water!</li> <li>• 1.5 GPM</li> <li>• 9-jet turbo massage is adjustable: gentle needle spray to forceful jet</li> <li>• Non-aerating spray means less temperature loss with maximum savings.</li> <li>• Self-cleaning and maintenance-free</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> </ul>
---	---


### **ESF20WH *Ecofitt Earth Massage White Showerhead 2.0 GPM***

	<p>The Ecofitt White Fixed Showerhead is a step beyond “low-flow,” ensuring 40% less water use than traditional low-flow showerheads currently on the market along with a consistent flow rate regardless of water pressure.</p> <ul style="list-style-type: none"> <li>• Non-removable flow-compensating technology guarantees a feeling of great force while using less water!</li> <li>• 2.0 GPM</li> <li>• 9-jet turbo massage is adjustable: gentle needle spray to forceful jet</li> <li>• Non-aerating spray means less temperature loss.</li> <li>• Self-cleaning and maintenance-free</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> </ul>
---	---


### **ESF15CH *Ecofitt 1.5 GPM Earth Massage Chrome Showerhead***

	<p>This showerhead’s non-aerating spray means less temperature loss with 40% more energy savings, conserves water and saves money while enhancing pressure, performance, appearance, and luxury.</p> <ul style="list-style-type: none"> <li>• 9-jet turbo massage is adjustable: gentle needle spray to forceful jet</li> <li>• Consistent flow rate regardless of water pressure</li> <li>• Non-removable flow compensator</li> <li>• Self-cleaning and maintenance-free</li> <li>• Installs easily, by hand and without tools.</li> <li>• Corrosion resistant high-impact ABS thermoplastic body</li> </ul>
---	---

### N2920 2.0 GPM Low Flow Showerhead Earth White

	<p>The patented pressure compensating technology of this showerhead ensures a powerful, consistent flow rate and its non-aerated stream reduces temperature loss and maximizes energy savings.</p> <ul style="list-style-type: none"> <li>• Flow Rate: 2.0 gallons per minute</li> <li>• Settings: 3 adjustable settings - needle, massage, and combination</li> <li>• Material: Corrosion-resistant high-impact ABS thermoplastic body</li> <li>• Finish: White</li> <li>• Installation: Wall fixed mount</li> <li>• Dimensions: 10.5L x 6.9W cm</li> </ul>
---	--

### N2912 1.25 GPM Earth Showerhead White

	<p>This showerhead uses patented Equiforce Technology for a consistent flow rate and its non-aerated spray to reduces temperature loss and maximizes energy savings.</p> <ul style="list-style-type: none"> <li>• Flow Rate: 1.25 gallons per minute</li> <li>• Settings: 3 adjustable settings - 9-jet spray, shower, and combination</li> <li>• Material: Acrylonitrile Butadiene Styrene (ABS) thermoplastic body</li> <li>• Finish: White</li> <li>• Installation: Wall mounted</li> <li>• Dimensions: 10.2L x 7W cm</li> <li>• Corrosion-resistant and high-impact design</li> <li>• WaterSense® Certified for water efficiency</li> </ul>
---	---

### **N2915V 1.5 GPM Earth 9 Jet White Shower Head W/ Built In Volume Control**



This showerhead features a white high-impact ABS thermoplastic body with pressure compensator flow control.

- 9-jet adjustable turbo massage with 3 spray patterns: needle, massage, combination
- Flow Rate: 1.5 GPM
- Adjustable angle
- Soak & Soap® On/Off Valve
- WaterSense® Certified
- Dimensions - 2-11/16" x 4-1/8"
- 10-year manufacturer warranty


### **N2915CH 1.5 GPM Earth Showerhead Chrome**



This Niagara patented non-removable pressure compensator provides a constant output of water regardless of pressure.

- Extra-large 4.4" (113mm) diameter
- 360° ball joint swivel for adjustment
- Rubber spray nozzles for easy cleaning
- Corrosion resistant high-impact ABS thermoplastic body
- Overall dimensions: 4.4" diameter x 3.1" (113 x 80mm)
- Stream Type: Symmetrical, Conical pattern
- Adjustable Angle: Yes
- Type of Control: Pressure Compensator
- Head Length: 3.1" (80mm)
- Head Diameter: 4.4" (113mm)
- Nozzle Quantity: 39

### **N3126VP-C 1.5 GPM Dual Function Aerator - All Chrome - Pom Ball**

	<p>The patented pressure compensator of this aerator provides constant flow regardless of water pressure.</p> <ul style="list-style-type: none"> <li>• 1.5 GPM &amp; 360° swivel action</li> <li>• Dual threaded for easy installation</li> <li>• A pause control reduces water flow to a thin stream while maintaining a constant temperature</li> <li>• Housing constructed of durable ABS plastic with high polish chrome finish</li> <li>• Soft rubber nozzles for easy cleaning and decalcification</li> <li>• Conical shape compensator helps to filter debris and mineral build-up</li> <li>• Switch from bubble spray mode to needle spray mode with a twist.</li> </ul>
---	--

### **N2610CH 1-Spray With 1.0-1.5 GPM Wall Mount Adjustable Fixed Shower Head**


	<p>This fixed shower head is designed to save water while providing a luxurious shower experience.</p> <ul style="list-style-type: none"> <li>• Adjustable Flow Rates: Two settings - 1.0 GPM for showering and 1.5 GPM for a powerful rinse.</li> <li>• Spray Settings: Even, needle spray with a large spray diameter.</li> <li>• Durable Design: Made from corrosion-resistant, high-impact ABS thermoplastic.</li> <li>• Compact and Modern: Features a sleek, modern design with a chrome finish</li> </ul>
---	--



### N3137 Toilet Tank Bankblue Vinyl 10 Mil Bag


	<p>Toilet Tank Bank™ is an easy-to-use, quick-to-install water saving device that clips onto the inside of the tank wall. With a patented air lock and fill valve, the Tank Bank™ eliminates water evaporation and odours and doesn't require maintenance.</p> <ul style="list-style-type: none"> <li>• Easy to use - fill to top, snap to close and hang in toilet</li> <li>• Every flush saves up to 0.8 gallons per flush</li> <li>• Constructed of non-corrosive materials that resist microbes and fungal growth</li> <li>• Anti-evaporation snap-lock means the bag never needs refilling and prevents odours</li> </ul>
---	--

### N3145 Adjustable Toilet Flapper


	<p>This toilet flapper features an adjustable timer dial that allows the user to fine-tune the water usage from tank to bowl.</p> <ul style="list-style-type: none"> <li>• Fits most 1.6-, 3.5-, 5- and 7-gallon toilets</li> <li>• Chlorine- and chloramine-resistant</li> <li>• Easy to install</li> <li>• Stainless steel ball chain, clasp and hook</li> </ul>
---	--



### N2146 Shower Coach Shower Timer

	<p>The Ecofitt Shower Coach gives you exactly five minutes and tells you when it is time to stop the water.</p> <ul style="list-style-type: none"> <li>While water conservation is becoming more crucial, this small, well-thought shower coach will help you save water when you shower.</li> </ul>
---	--

### N3140 Leak Detection Dye Tablets

	<p>Our leak-detection tablets are used to rapidly identify a leaky toilet, which can save thousands of gallons of water per year.</p> <ul style="list-style-type: none"> <li>Helps avoid undetected leaks from damaged flappers</li> <li>Simply place the leak detection tablets into the toilet's tank, and if blue water appears in the bowl, there is a damaged flapper that needs to be replaced</li> <li>These dye tablets are nontoxic, packaged in moisture-resistant packs, and include easy-to-follow directions</li> </ul>
--	--



## More Energy Savings

### 50016WD Block Heater Timer



This block heater timer is designed to be used with block heaters for cars, utility trucks, school buses, and small appliances for convenience and energy savings.

- 1 on/off setting per day, repeats daily.
- Easy, 2-button programming.
- Compatible with CFL, LED, and incandescent lights.
- Self-recharging battery stores programs.
- CSA Certified
- Two grounded outlets, 6-inch power cord.
- Color: Black.
- Electrical specifications: 125V AC, 60 Hz, 15A, 1875W Resistive / 10A, 1250W Tungsten / 8A Ballast.

### N9173G Fridge/Freezer Thermometer



Our bi-metal refrigerator/freezer thermometer accurately displays temperature in both Fahrenheit and Celsius.

- Easy installation with a magnetic and adhesive backing for different mounting and placement options.
- Adjusting refrigerator and freezer temperatures to the recommended settings saves energy and improves refrigerator/freezer efficiency by up to 8 percent.
- The optimal refrigerator temperature range for food safety is 36°F to 40°F; the freezer should be set to zero.


## TS1810 Power Strip Aps

	<p>This power strip reduces active and standby power loss in home entertainment setups, through detecting when the TV and related electronics are not being used and turns them off.</p> <ul style="list-style-type: none"> <li>• Utilizes advanced power measurement and patented auto-threshold detection technology.</li> <li>• Compatible with all types of TVs.</li> <li>• Detects infrared (IR) remote control activity and motion to determine TV usage.</li> <li>• Turns off the TV and any electronics plugged into the switched outlets if no IR remote control activity or motion is detected during the countdown period.</li> </ul>
--	--


## N4101 Teflon Tape 1/2" X 60"

	<p>Plumber's Tape is a heavy-duty poly tape that is great for filling the gap between threads and preventing leaks.</p> <ul style="list-style-type: none"> <li>• Seals and lubricates male pipe threads of all size</li> <li>• Size: 1/2" X 60"</li> </ul>
--	--

**N9010 1/2"X3' Closed Cell Pipe Insulation**

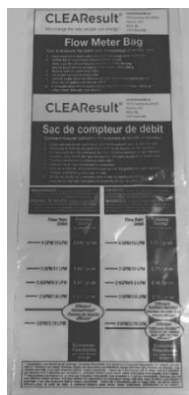
	<p>Niagara's Pipe Insulation reduces heat loss and saves energy. Insulated hot water pipes can raise water temperature by 2°F-4°F which allows the homeowner to lower the temperature setting.</p> <ul style="list-style-type: none"><li>• Great for insulating hot water, non-steam pipes.</li><li>• Helps prevent freezing, heat loss, stops sweating, and reduces "wait time" for hot water.</li><li>• Polyethylene insulation is flexible and easy to install.</li><li>• ASTM E 84 1" 25/50 and UL 181 Sections 11.0a16.0.</li><li>• Product Number: N9010</li><li>• Product Dimensions: 1/2" ID x 1/2" wall x 3' long</li><li>• Adjustable: No (fixed diameter)</li></ul>
---	--

**EN9011 3/4 Pipe Insulation**

	<p>This Pipe Insulation reduces heat loss and saves energy while also preventing freezing, stopping sweating, and reduces "wait time" for hot water.</p> <ul style="list-style-type: none"><li>• Great for insulating hot water, non-steam pipes.</li><li>• Polyethylene insulation is flexible and easy to install.</li><li>• ASTM E 84 1" 25/50 and UL 181 Sections 11.0a16.0.</li><li>• Product Number: N9010</li><li>• Product Dimensions: 3/4" ID x 3/4" wall x 3' long</li><li>• Adjustable: No (fixed diameter)</li></ul>
---	--



## S2065-B Flow Bag Testers



Our Flow Meter Bag helps determine the flow of showerheads and faucet aerators.

- The bag is calibrated, reusable and a low-cost way to measure fixture flow in gallons per minute.

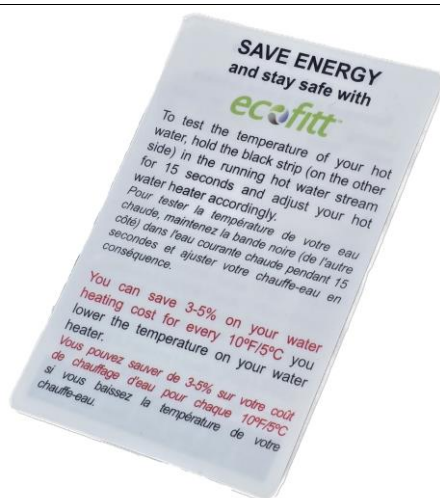
## N9150K Furnace Filter Whistle with Instructions



Our furnace filter whistle easily attaches to a new furnace or air conditioner filter and sounds when your filter becomes 50% clogged, letting you know it is time to replace the filter.

- Reusable
- Individually packaged with simple-to-use instructions

## N181C Hot Water Temp Card



A Hot Water Temperature Gauge illustrates the temperature of a hot water heater. If the temperature is 120° F or more, users know their hot water heater is turned up too high. When a water heater is optimally set, users can realize significant savings. This Hot Water Gauge assesses current water heater settings in comparison to ideal settings.

- Size: 3-3/8" x 2-1/2" x 1/4"

## N9189 Refrigerator/Freezer Temperature Card



Great tool to help reduce energy costs by adjusting refrigerator and freezer temperatures to the recommended settings saves energy and improves refrigerator/freezer efficiency by up to 8 percent.

## 8074S PB Door And Window Adhesive V-Type Weatherstrip 17




The pre-scored polypropylene of this weatherstrip offers outstanding conformability to accommodate both large and small gaps.

- Installs in minutes without special tools; just cut to size, fold, and apply.
- Premium ultra cord adhesive remains applied to windows and doors for years.
- Composition: Polypropylene
- Premium ultra cord adhesive backing
- Product Dimensions: 17' per roll
- Colour: White

### 4020S PB Foam Door and Window Closed-Cell Weatherstrip

	<p>Niagara's Door and Window Closed-Cell Foam Weatherstrip is constructed of 100% PVC foam. By eliminating drafts and moisture, and retaining comfortable heating and cooling conditions, weatherstripping is an ideal solution for long-term energy efficiency and savings.</p> <ul style="list-style-type: none"> <li>• Composition: Closed-Cell Foam</li> <li>• Type: Door and Window Closed-Cell Foam Weatherstrip</li> <li>• Adhesive Backing: Pressure-Sensitive Acrylic Adhesive</li> <li>• Product Dimensions: 3/8" x 3/16" x 17"</li> <li>• Color: Gray</li> </ul>
---	---

### N4000-P12 Clear Safety Caps/Draft Plugs - 18pk

	<p>Niagara's Clear Safety Caps are easily inserted into unused outlets to conserve energy and help to promote child safety.</p> <ul style="list-style-type: none"> <li>• Polypropylene outlet sealers</li> <li>• Injury prevention for children by barring access to electric outlets</li> <li>• Childproof and choke test approved</li> <li>• Easy to place in an outlet when not in use</li> <li>• Saves energy by helping reduce draft through vacant receptacle outlets</li> </ul>
---	--





## 1004SPB Shrink-Fit Window Film Kit 42" X 62"

	<p>This easy-to-use kit contain plastic shrink film and two-way tape to seal windows airtight to help eliminate condensation, cold drafts, and heat loss.</p> <ul style="list-style-type: none"><li>• Tape securely holds plastic in place, hair dryer shrinks film to form smooth, airtight, clear-as-glass insulating storm window.</li><li>• Cut film to size for application to multiple windows, less waste, less expense, and a neater, more efficient installation.</li><li>• An ideal, low-cost way to insulate and eliminate drafts in older windows to save energy and reduce heating and cooling costs</li><li>• Interior/Exterior Use: Interior</li><li>• Product Dimensions: 42" x 62"</li></ul>
---	---

## 1006S PB Shrink-Fit Window Film Kit 62" X 210"

	<p>This easy-to-use kit contain plastic shrink film and two-way tape to seal windows airtight to help eliminate condensation, cold drafts, and heat loss.</p> <ul style="list-style-type: none"><li>• Tape securely holds plastic in place, hair dryer shrinks film to form smooth, airtight, clear-as-glass insulating storm window.</li><li>• Cut film to size for application to multiple windows, less waste, less expense, and a neater, more efficient installation.</li><li>• An ideal, low-cost way to insulate and eliminate drafts in older windows to save energy and reduce heating and cooling costs</li><li>• Interior/Exterior Use: Interior</li><li>• Product Dimensions: 62" x 210"</li></ul>
---	--





### 8006S PB *Foam Backer Rod 3/4" X 15'*



This foam backer rod insulator seals out dust, air, rain, and wind-driven snow.

- Dimensions: 3/4-inch diameter, 15 feet length
- Material: Durable and compressible foam
- Moisture Proof: Prevents moisture infiltration
- Applications: Ideal for filling gaps in windows, doors, and expansion/compression joints
- Resistance: Highly resistant to dirt and pests
- Ease of Use: Conforms to contours easily and is simple to install

### 8001S PB *Insulating Foam Backer Rod 3/8 In. X 30 Ft.*



This foam backer rod insulator seals out dust, air, rain, and wind-driven snow.

- Dimensions: 3/8-inch diameter, 30 feet length
- Material: Durable and compressible foam
- Moisture Proof: Prevents moisture infiltration
- Applications: Ideal for filling gaps in windows, doors, and expansion/compression joints
- Resistance: Highly resistant to dirt and pests
- Ease of Use: Conforms to contours easily and is simple to install

## 1003S PB Interior Patio Door Insulation Kit 84 X 86"



This insulation kit features easy to install clean film suitable for patio doors.

- Dimensions: Clear film sheet (84" x 86" / 2.1 m x 2.2 m)
- Adhesive: Double-sided adhesive tape for windows and doors
- Coverage: Suitable for patio doors up to 6' x 6'8" (183 cm x 203 cm)
- Material: Crystal clear film
- Installation: Easy to install with premium adhesive
- Origin: Made in North America


## 1004S PB Window Shrink Kit 42" x 64"



This POLAR BEAR Insulating Film Kit for 1 Window reduces heat loss and prevents frost and condensation.

- Dimensions: 0.6mm x 62" x 42"
- Easy Installation: Simple to apply with included adhesive tape
- Clear Film: Maintains visibility while providing insulation
- Energy Efficient: Helps lower heating costs by improving window insulation
- Durable Material: Made from high-quality plastic for long-lasting use


### N4014V Universal Switch and Outlet Gaskets - 10 Pack

	<p>These gaskets save energy through acting as insulation to prevent drafts in the empty space between switch and outlet plates with insulation to prevent drafts.</p> <ul style="list-style-type: none"> <li>• UL-listed</li> <li>• Flameproof</li> <li>• Low-density PVC will not burn in a vertical or horizontal position</li> <li>• Contains 10 universal gaskets to fit traditional switch plates and outlets or newer decora style switch plates and outlets</li> </ul>
---	--


### N1001 Deluxe Caulking Gun

	<p>Niagara's Ratchet-Type Quick Release Gun for Caulk and Sealant features a high-quality constructed steel body that is designed to hold standard 10.1 oz caulk or sealant cartridges.</p> <ul style="list-style-type: none"> <li>• This caulk gun is suitable for use with all grades of caulks, sealants and adhesives from heavy to light consistencies.</li> <li>• Holds a standard 10.1-oz. caulk or sealant cartridge</li> <li>• Steel body is corrosion resistant with round drive-rod</li> <li>• Composition: Steel</li> </ul>
---	---


### 1652SPB Soft Rubber Door and Window Seal 16'

	<p>This door and window seal features premium adhesive for an easy and secure installation.</p> <ul style="list-style-type: none"> <li>• Clear film sheet (1.3" x 16.4')</li> <li>• Adhesive tape for windows and doors</li> <li>• Crystal clear film for unobstructed view</li> </ul>
---	--


### TS2003 Plug-in Energy Monitor - Watt Meter, Power Meter, Electric Meter, Outlet Tester

	<p>This plug-in energy monitor provides real-time results, displays energy use in watts, cost, and CO2 emissions.</p> <ul style="list-style-type: none"> <li>• LCD Screen: Shows energy usage, cost, and environmental impact.</li> <li>• Accurate Data: Measures watts, amps, voltage, and CO2 emissions.</li> <li>• Cost Calculation: Estimates energy costs with user-entered rates.</li> <li>• Overload Protection: Ensures safe operation of devices.</li> <li>• Forecasting: Tracks future energy consumption and cumulative totals.</li> </ul>
---	---

## 74852 162-ML White Acrylic Latex Plus Silicone Caulking

	<p>This ALEX PLUS White Acrylic Latex Caulk Plus Silicone comes in a 162-mL squeeze tube.</p> <ul style="list-style-type: none"> <li>• Colour: White</li> <li>• Material: Acrylic Latex with Silicone</li> <li>• Coverage: 28 linear feet</li> <li>• Cure Time: 24 hours</li> <li>• Dry to Touch: 10 minutes</li> <li>• Paintable</li> <li>• Excellent flexibility</li> <li>• Easy water clean-up</li> <li>• Low odour and low VOC</li> <li>• Mold and mildew resistant</li> <li>• Suitable for indoor and outdoor use</li> </ul>
---	---


## Foil Tape (46M)

	<p>This 3M™ Aluminum Foil EMI Shielding Tape 1170 is suitable for EMI shielding, grounding, and static charge draining and comes with a removable liner for easy die cutting and handling.</p> <ul style="list-style-type: none"> <li>• Dimensions: 2 inches wide, 18 yards long (5.08 cm x 16.5 m)</li> <li>• Material: Aluminum foil with conductive acrylic adhesive</li> <li>• Temperature Range: -40°F to 266°F (-40°C to 130°C)</li> <li>• Voltage Rating: 600V dry applications</li> <li>• Shielding Effectiveness: Above 85 dB, 1MHz to GHz</li> <li>• Flame-retardant</li> </ul>
---	---

### C3010D-CA Kidde Nighthawk Carbon Monoxide Alarm


	<p>Kidde Nighthawk™ AC Plug-in Operated Carbon Monoxide Alarm with Digital Display (KN-COPP-3).</p> <ul style="list-style-type: none"> <li>• Power Source: Plug-in (AC) with 9V battery backup</li> <li>• Digital Display: Shows CO levels from 30-999 PPM, updates every 15 seconds</li> <li>• Test/Reset Button: Tests circuitry and horn, resets during alarm</li> <li>• Peak Level Button: Displays peak CO level recorded since last reset</li> <li>• Mounting Options: Direct-plug, 6' power cord, or tabletop</li> </ul>
---	---

### C3010-CA Kidde Carbon Monoxide Alarm


	<p>This Kidde Carbon Monoxide alarm is easy to install, with a mounting bracket, and features event memory with alerts if a high level of carbon monoxide has been detected within the last 14 days.</p> <ul style="list-style-type: none"> <li>• Power Source: 10-year sealed-in lithium battery</li> <li>• Sensor Technology: Electro-chemical sensing technology</li> <li>• LED Indicators: Green for normal operation, Red for alarm, Amber for error</li> <li>• Test/Reset Button: Tests CO alarm circuit operation and allows immediate silencing of the alarm</li> </ul>
---	---



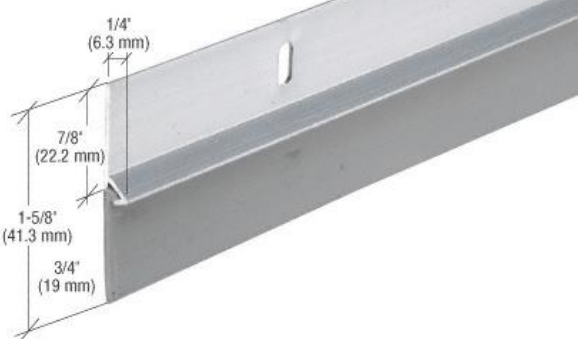
### **DS128W36 PVC Door Shoes and Door Sweep**

	<p>This PVC door shoe and door sweep is suitable for 1-3/4" doors.</p> <ul style="list-style-type: none"> <li>• Finish: White</li> <li>• Notched ends for weatherstrip clearance</li> <li>• Rain drip design to prevent water infiltration</li> </ul> <p>Dimensions:</p> <ul style="list-style-type: none"> <li>• Length: 36 inches (can be cut to 35-3/4 inches)</li> <li>• Width: 1-3/4 inches</li> <li>• Height: 1-7/16 inches</li> </ul>
---	--


### **DS121AV36 Aluminum Threshold Outswing Door**

	<p>The Climaloc CF10190 is intended for use with an out-swing door and seals gaps up to 1/4 inches.</p> <ul style="list-style-type: none"> <li>• Weather-stripping</li> <li>• Screws included</li> <li>• Flexible vinyl seals bottom of threshold</li> <li>• Low-profile aluminum threshold with vinyl inserts</li> <li>• Dimensions: 3 feet long, 1.5 inches wide</li> </ul>
---	---

### DS156A36 CRL Aluminum Door Sweep


	<p>The CRL Aluminum Door Sweep (DS37A) features a universal design suitable for most standard doors and is energy-saving by filling large under-door gaps.</p> <ul style="list-style-type: none"> <li>• Material: Extruded aluminum with flexible vinyl wipe</li> <li>• Finish/Colour: Aluminum</li> <li>• Slotted holes for easy adjustment</li> </ul> <p>Dimensions:</p> <ul style="list-style-type: none"> <li>• Length: 36 inches</li> <li>• Full Height: 1-5/8 inches</li> <li>• Vinyl Height: 3/4 inch</li> <li>• Front Face Width: 1/4 inch</li> <li>• Height: 7/8 inch</li> </ul>
---	---

### FWM-01-10001 Titebond Heavy Duty Construction Adhesive


	<p>This construction adhesive is compatible with common building materials including wood, metal, brick, marble, ceramic tile, concrete, drywall, plywood, OSB, particleboard, and wet, frozen, and treated lumber.</p> <ul style="list-style-type: none"> <li>• Best choice for all-around use</li> <li>• Bonds heaviest materials</li> <li>• Waterproof and all-weather</li> <li>• Superior strength and exceptional durability</li> <li>• Solvent-based and extremely versatile</li> </ul>
---	---



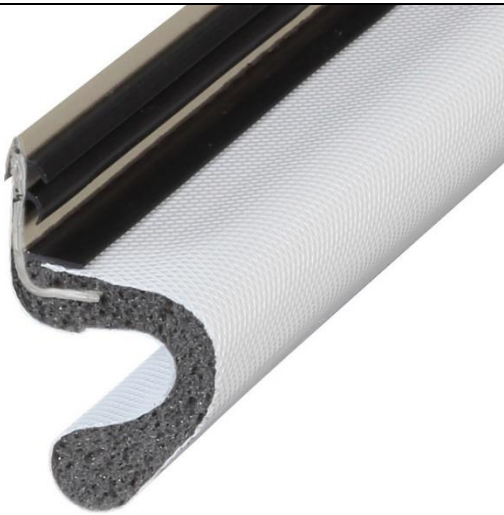
### NUC-01-10065 PF-50 Straw Foam with Straw

	<p>This straw foam features low expansion, one-component polyurethane foam that is UL classified and designed to be used with a straw dispenser.</p> <ul style="list-style-type: none"> <li>• One-component polyurethane foam</li> <li>• Closed cell structure to reduce air and insect infiltration</li> <li>• Freeze-thaw stable</li> <li>• Reusable when stored properly</li> <li>• Suitable for extreme temperature conditions up to -18°C</li> <li>• Ideal for sealing gaps, holes, and crevices in residential, commercial, and industrial settings</li> </ul>
---	--

### MIS-01-10784 Durofoam EPS Rigid Insulation

	<p>This Durofoam EPS Rigid Insulation contains a closed cell structure for moisture resistance.</p> <ul style="list-style-type: none"> <li>• Dimensions: 96 inches x 48 inches x 1.5 inches</li> <li>• Material: Expanded Polystyrene (EPS)</li> <li>• Film on both sides for ease of use and installation</li> <li>• Flexible and easy to install</li> <li>• Meets building code requirements for roofs, walls (interior &amp; exterior), and foundations</li> <li>• Guaranteed R-Value for the life of the product</li> </ul>
---	---


### **DS422W16.5 Door Weatherstrip, 81 In L, Climaloc Foam**

	<p>This Climaloc CF65821 provides a weather-tight seal around door frames, improving energy efficiency.</p> <ul style="list-style-type: none"> <li>• Dimensions: 81 inches long, 1 inch thick, 3 inches wide</li> <li>• Material: Polyfoam</li> <li>• Colour: White</li> <li>• Easy installation with no specific tools required</li> <li>• Seals gaps up to 1/2 inch</li> <li>• Vinyl-coated foam for durability</li> </ul>
---	--


### **1007S PB Window Insulating Film Kit (62 X 84 inch)**

	<p>This Polar Bear Interior Window Insulation Kit (1007SPB) shrinks "tight as a drum" when heated.</p> <ul style="list-style-type: none"> <li>• Dimensions: 62 inches x 84 inches</li> <li>• Material: Clear film</li> <li>• Coverage: Suitable for 2 interior windows</li> <li>• Reduces heat loss and prevents frost and condensation</li> <li>• Easy to install with included double-sided adhesive tape</li> <li>• Applications: Ideal for insulating windows during winter months</li> </ul>
---	---

## Refrigerator/Freezer Temperature Card

 <p>The image shows a 'Refrigerator &amp; Freezer Thermometer Card' with instructions and temperature scales. The freezer scale ranges from -5°F to -10°F, and the refrigerator scale ranges from 37°F to 43°F. It also includes a 'SAVE ENERGY' section with instructions on how to use the card to save energy.</p>	<p>The Bulk Energy Saving Refrigerator Thermometer Card ensures refrigerator temperature settings are optimal for energy efficiency and food safety.</p> <ul style="list-style-type: none"> <li>Recommended Temperature Settings are printed on the card for easy reference</li> </ul>
--	--

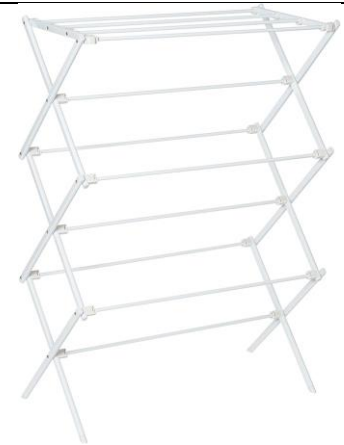
## 900-0263CO-CA AC Plug-In Carbon Monoxide Alarm

 <p>The image shows a white, rectangular Kidde carbon monoxide alarm. It features a 'TEST / RESET' button, a 'LOW BATTERY HUSH' button, and a 'BATTERY BACKUP' section. The alarm is designed to be plugged into an AC wall outlet.</p>	<p>This plug-in carbon monoxide alarm features tamper resistant technology, when activated, unit goes into constant alarm mode if it has been unplugged or has come loose from the outlet.</p> <ul style="list-style-type: none"> <li>Test / Reset Button - Tests the unit for proper operation. Resets the carbon monoxide alarm.</li> <li>Low Battery Hush® - Silences low battery chirp warning for up to twelve hours in order to maintain protection without having to replace the batteries at an inconvenient time.</li> <li>AC Plug-in Operated - Easy to install - just plug into an AC wall outlet.</li> <li>AA Battery Backup - Provides continuous protection in case of a power failure.</li> <li>CSA Listed</li> </ul>
---	--

## MS-OPS5M-WH Maestro Sensor Switch, 5A

 <p>Packaging may vary</p>	<p>The Lutron MS-OPS5M-WH Maestro Sensor Switch features Advanced XCT Sensing Technology, detecting fine motion 2-3 times better than competition with up to 900 square feet of coverage.</p> <ul style="list-style-type: none"> <li>• Operation Mode: ON-OFF</li> <li>• Current Rating: 5 Amps</li> <li>• Motion Sensor: Automatically turns lights or exhaust fans on and off</li> <li>• Easy Installation: Replaces existing switches without requiring a neutral wire</li> <li>• Compatibility: Works with all bulb types</li> <li>• Ambient Light Detection: Prevents lights from turning on if there is enough natural light</li> <li>• Programmable Settings: Adjustable timeout settings (1, 5, 15, or 30 minutes)</li> </ul>
---	---

## DRY-01227 Foldable Clothes Drying Rack

	<p>This drying rack features Rust-resistant stainless-steel construction along with a foldable design for easy storage.</p> <ul style="list-style-type: none"> <li>• Material: Stainless Steel</li> <li>• Weight: 8 lbs.</li> <li>• Capacity: Holds up to 40 lbs. of laundry</li> <li>• Multiple drying rods for ample space</li> <li>• Adjustable height for versatile use</li> <li>• Non-slip feet for stability</li> <li>• Suitable for indoor and outdoor use</li> </ul>
---	--

### **DRY-01113 Retractable Clothesline**



This clothesline features a durable and rust-resistant stainless-steel line along with a retractable design for easy storage when not in use.

- Material: ABS plastic casing with stainless steel line
- Line Length: Extends up to 49 feet
- Weight Capacity: Holds up to 30 lbs. of laundry
- Easy to install with included mounting hardware
- Adjustable tension to prevent sagging
- Suitable for indoor and outdoor use
- Space-saving solution for drying clothes